



Up to 6000 divisions OIML-R60

Measuring element from steel alloy

Protected against corrosion by nickel-plated treatment


Available also in stainless steel

Protected against humidity IP-67

High accuracy with off-centre loads 500x500 mm


TECHNICAL DATA

Accuracy class	C3-C6
Rated output	2 mV/V +/-10%
V /min	Emax/12000
Excitation Voltage	5- 15 V
Input Resistance	390 +/-30 h m
Output resistance	350 +/-30 h m
Temperature limits OIML R60	-10° C / +40° C
Insulation resistance	> 5000 MOhm

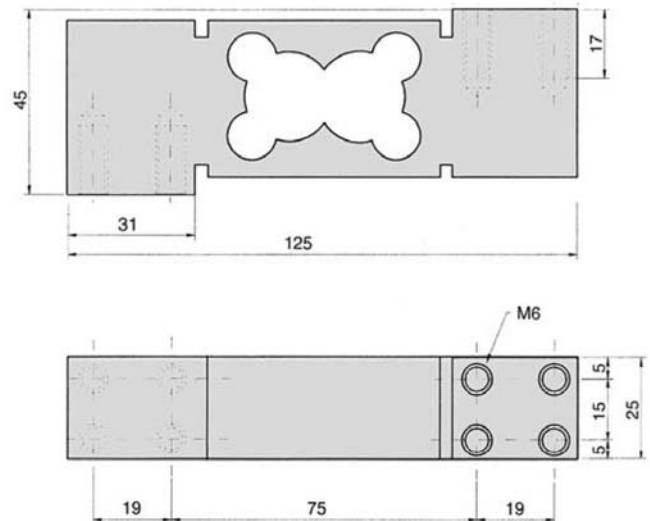

CONNECTIONS

- + Input: Red
- + Sense: Yellow
- Input: Black
- Sense: Blue
- + Output: Green
- Output: White

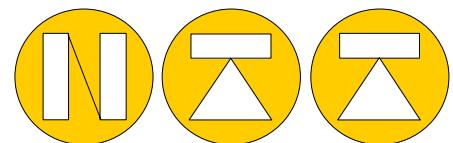

NORDIC TRANSDUCER

Nordic Transducer
Tel.: +45 98581444 · Fax: +45 98581866
Web: www.ntt.dk · e-mail: ntt@ntt.dk