


19 mm

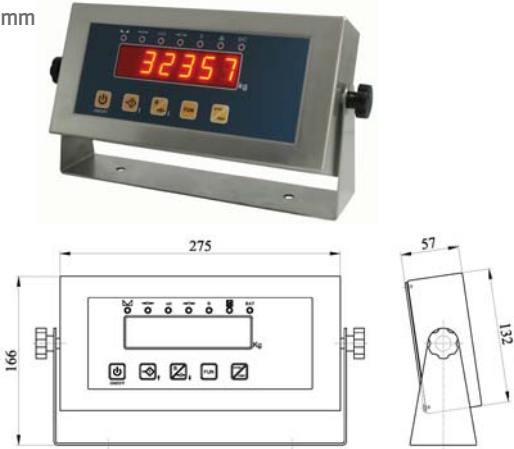

Generals

Remote repeaters with more than 60 IN/OUT protocols:

RS232, RS485 and wireless connectivity


Ultra bright variable luminosity LEDs large displays possibility

Remote tare, zero and accumulate key functions available


Indicator's functionalities are available (relays, 4-20mA outputs, 0-10V outputs, etc.)

Protocols conversion if desired (input and output ones)

40 mm

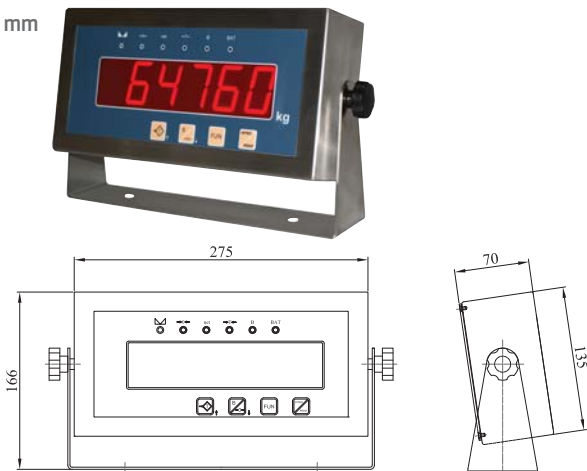

60 mm

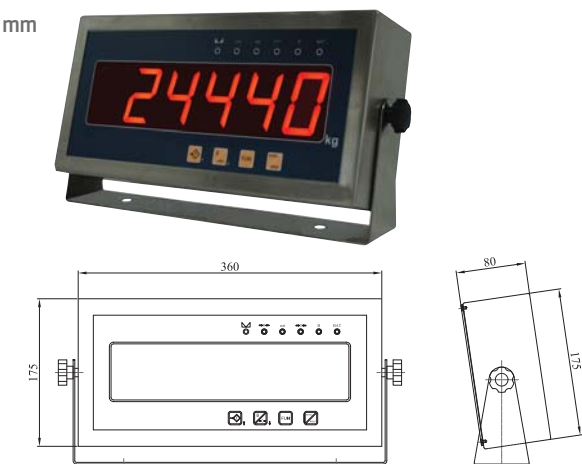


100 mm Display



100 mm LEDs

Ultra bright for outdoors

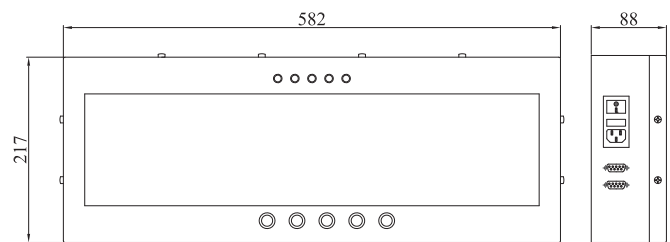

Multiple wireless connection possibilities (Indicator-Indicator, Indicator-PC, communication nets...)

